


SD-11 Series:



Groove :

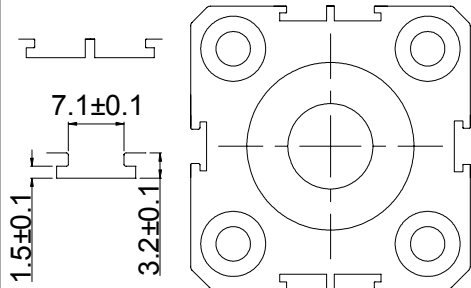

Unit : mm



Specification

Type	SD - 11R		SD - 11N		SD - 11P	
Characteristics						
Wiring	2Wire		3 Wire			
Connect Diagram						
Switching logic	Normally open		Solid state output, Normally open			
Output	Reed switch		NPN Sinking		PNP Sourcing	
Lead wire type	Horizontal					
Load voltage	5 ~ 240V DC/AC		5~28V DC			
Load current	100mA Max.		200mA Max.			
Switching rating	10W Max.		6W Max.			
Current consumption	---		20mA Max.@ 24V		18mA Max.@ 24V	
Voltage drop	2.5V Max.@ 40mA DC		0.5V Max.@ 200mA (Resistive load)			
Leakage current	---		0.01mA Max.			
Frequency	200Hz		1000Hz			
Shock	30G		50G			
Vibration	90 m/s ² (9G), Double amplitude 1.5 mm					
Insulation resistant	DC 500V 100MΩ (Lead wire to case)					
Withstand voltage	AC 1000V (50/60Hz) 1 minute (Lead wire to case)					
CE & Protection IP	EN60947-5-2 IEC529 IP67(NEMA 6)					
Indicator	Red LED				Green LED	
Cable	3.3φ, 2C, Gray PVC		3.3φ, 3C, Black PVC			
Temperature range	-10 ~ 70°C					
Protection circuit	---		Reverse polarity; Surge suppression			
Dimensions	SD-11R SD-11R-M8QD SD-11R-M12QD		SD-11N SD-11N-M8QD SD-11N-M12QD		SD-11P SD-11P-M8QD SD-11P-M12QD	
					M8 (2-Wire QD Link)	
					M8 (2-Wire E-QD Link)	
					M8 (3-Wire QD Link)	
				M12 (3-Wire QD Link)		